

Množstvo	Popis
1	COMFORT 15-14 B TDT  Poznámka: Obrázok produktu sa môže líšiť od skutočného produktu Objednacie č.: 93093537 COMFORT TDT is an efficient circulator designed for hot-water recirculation in residential buildings with a dedicated return line. It is compatible with all types of water heater tanks, tankless systems, solar or heat pumps regardless of whether the system has mixing or tampering valves installed. The pump features a compact housing and a permanent magnet with an integrated control unit. The spherical rotor, equipped with an impeller, ensures optimal functionality supported by a robust single-bearing ball system. The drinking-water approved brass pump housing guarantees both safety and reliability. COMFORT TDT moreover features a built-in temperature sensor to maintain precise water temperature. The user-friendly interface features LEDs and push-buttons on the operating panel. This offers an intuitive way to display and set operating times and control modes and ensures a comfortable and energy-efficient experience for residential use. The timer control mode enables the pump to operate continuously based on set operating times with the smallest time increment being 30 minutes. In case of power failure, the timer pauses with no power reserve. However, the selected operating times and actual time are retained. When power is restored, the pump resumes its last set operating state. If the power outage exceeds 15 minutes, the actual time may need to be reset. The timer and temperature control mode enables the pump to operate based on set operating times and the functionalities of temperature mode, with operating times taking priority. This means that the temperature mode is only active during the specified operating times. This control mode automatically activates the pump when the internal temperature sensor detects that the water temperature drops below a certain level. The control mode automatically adjusts the on/off temperature based on the maximum temperature measured in the system. The maximum temperature of the system is measured every 12 hours for 15 minutes, enabling dynamic adjustment of the on/off temperature. The product offers: • Q-H performance that is designed for single—and multi-family homes, depending on the required duty point to accommodate heat loss in a specific pipe layout. • Heat loss reduction by 56 % compared to continuously running pump. • Low power consumption and silent operation. • Compliance with pipe manufacturers' flow velocity limits, including DN 15, DN 20 PEX, copper, and others. • Drinking-water approval, ensured by the brass pump housing, stainless-steel rotor, and composite impeller. • A design that makes it easy to clean limescale and foreign deposits by removing the pump head, enabling the product to meet unlimited water hardness requirements. • Dry-running protection to prevent failure if the system runs out of water. • Multiple installation positions, even with the pump head pointing downwards.



Názov spoločnosti:

Vytvoril:


Telefón:

Dátum:

23.5.2025

Množstvo	Popis
1	• A pump head designed to fit brass pump housings of old and new pumps of the same design, even from different pump manufacturers (such as WILO, VORTEX, LOWARA, DAB and others). • Easy electrical installation, which is provided by a pre-assembled power plug with a 1.5 m cable and a double insulation protection design, which eliminates the need for a ground wire. • Insulating shells for heat loss reduction. • Non-return and shut-off valves included in "BX" variant, reducing installation cost. • An optional venting flange that provides a simple way to vent or drain the system without the need to install an additional venting valve permanently. • Optional fittings for pipe connections in different sizes and types. • Optional non-return and shut-off valves are available.


93093537 COMFORT 15-14 B TDT

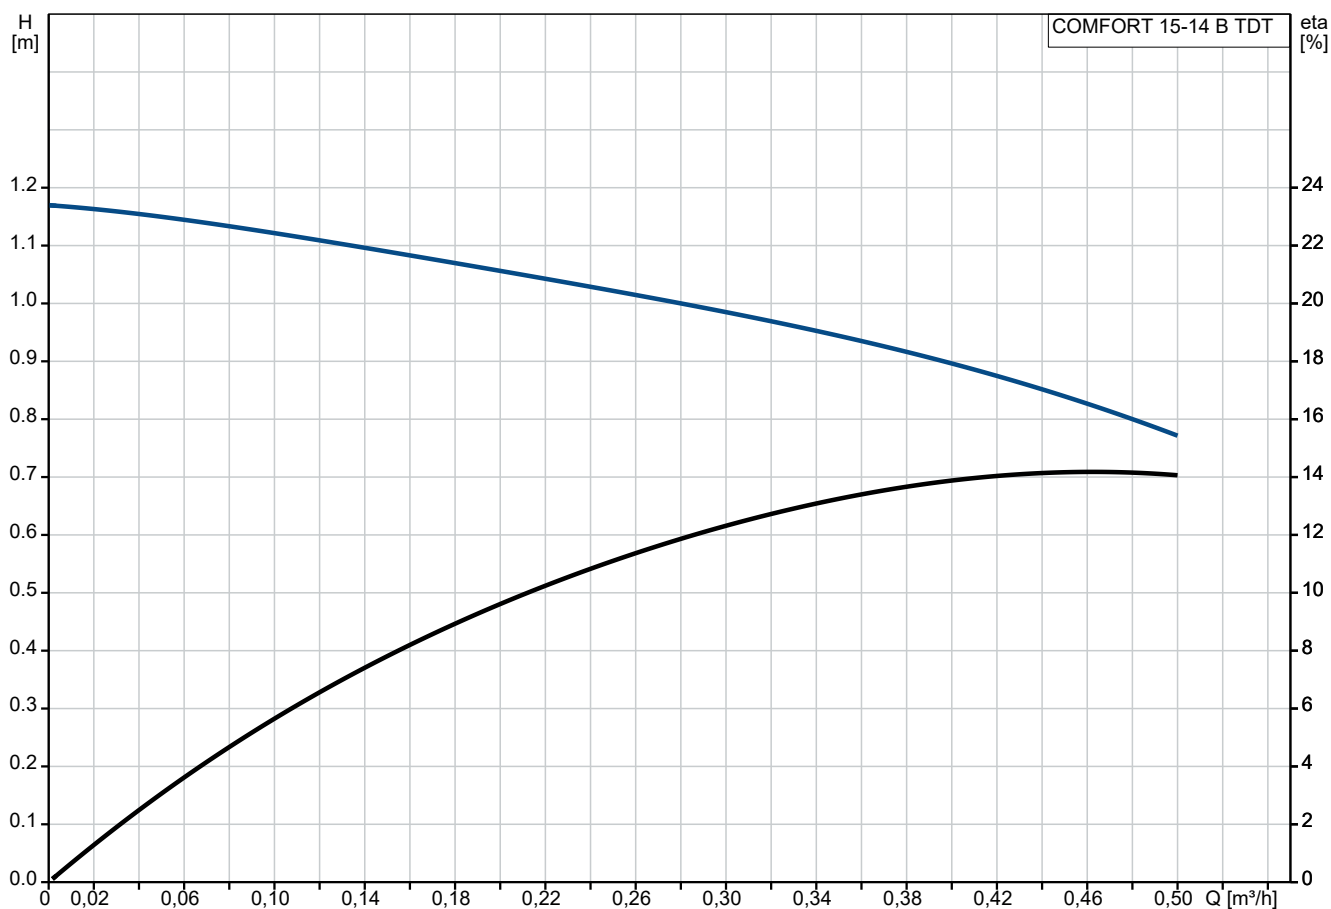


Čerpaná kvapalina = Voda

Teplota kvapaliny počas prevádzky = 60 °C




Hustota = 983.2 kg/m³

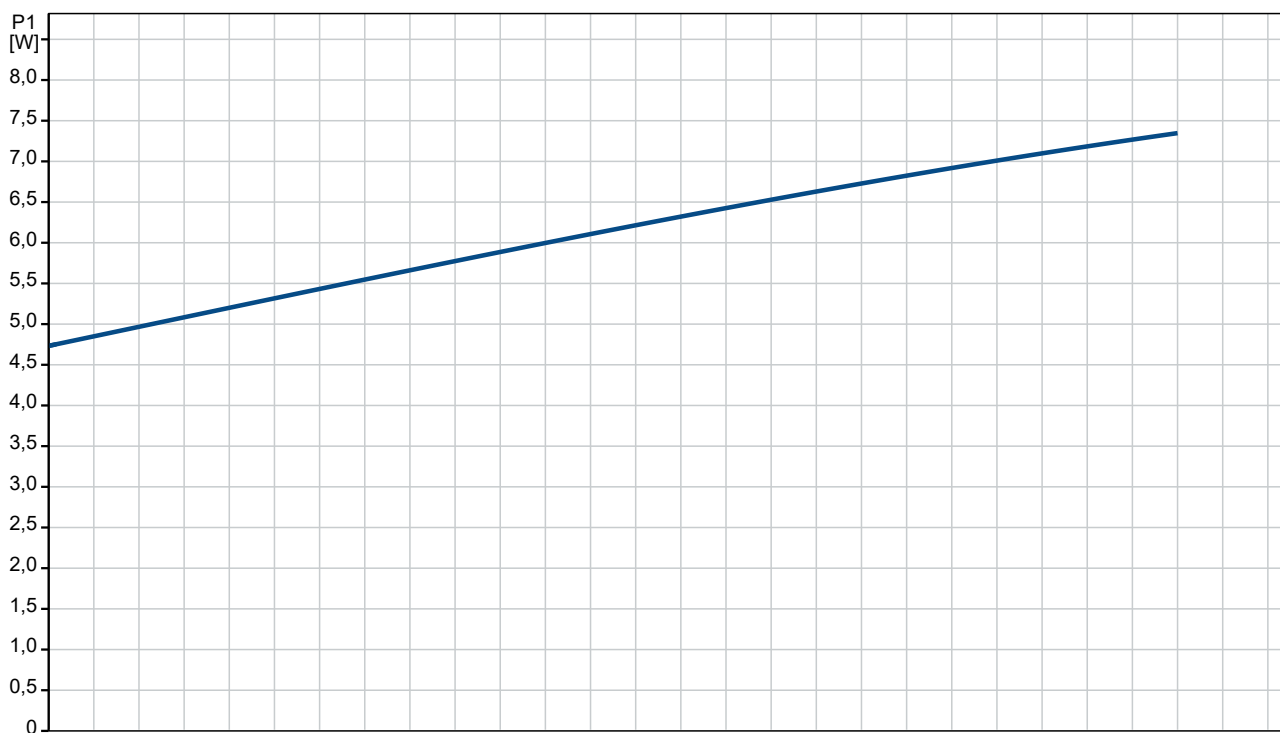


Popis	Hodnota
Všeobecné informácie:	
Názov produktu:	COMFORT 15-14 B TDT
Objednacie číslo:	93093537
Číslo EAN:	5715467675740
Techn.:	
Počet otáčok:	1
Menovitý prietok:	0.45 m³/h
Men.dopravná výška:	0.9 m
Max. výtláčna výška:	14 dm
Trieda TF:	95
Schválenia:	CE,VDE,EAC,WEEE
Materiály:	
Teleso čerpadla:	Mosadz
	CuZn39Pb3, MS58
Obežné koleso:	Kompozit
	PPO-GF20/Stainless steel
Inštalácia:	
Min. okol. teplota:	0 °C
Maximálny prevádzkový tlak:	10 bar
Potr. prip. štandard:	ISO 228-1
Druh pripojenia:	Rp
Veľkosť pripojenia:	1/2 inch
PN pre potrubnú prípojku:	PN 10
Pripojenie na prip.:	80 mm
Kvapalina:	
Čerpaná kvapalina:	Voda
Rozsah teploty kvapaliny:	2 .. 95 °C
Vybraná teplota kvapaliny:	60 °C
Hustota:	983.2 kg/m³
Elektrické údaje:	
P1 max.:	7 W
f:	50 / 60 Hz
Menovité napätie:	1 x 230 V
Elektrický prúd pre otáčkový stupeň 3:	0.07 A
Krytie IP:	IP44
Izolácia:	F
Norma na ochranu pred výbuchom:	ELECT.
Teplotná ochrana:	Impedančne chránené
Riadiace jednotky:	
Operation mode include:	Timer
Iné:	
Čistá hmotnosť:	0.94 kg
Hrubá hmotnosť:	1.04 kg
Prepravné množstvo:	0.003 m³
Dánčina:	380636004
Švédčina:	5792023
Nórčina:	1383193
Krajina pôvodu:	DE
Tarifná klasifikácia č.:	84137030

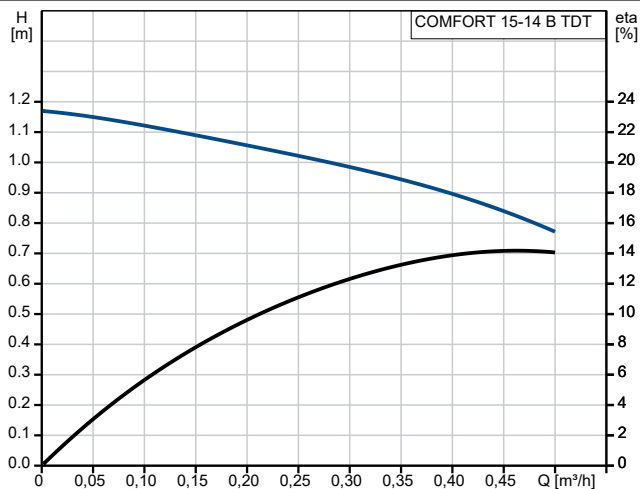

Čerpaná kvapalina = Voda
Teplota kvapaliny počas prevádzky = 60 °C
Hustota = 983.2 kg/m³

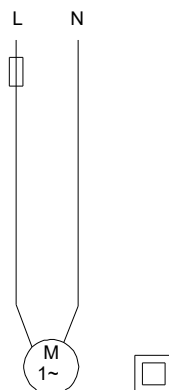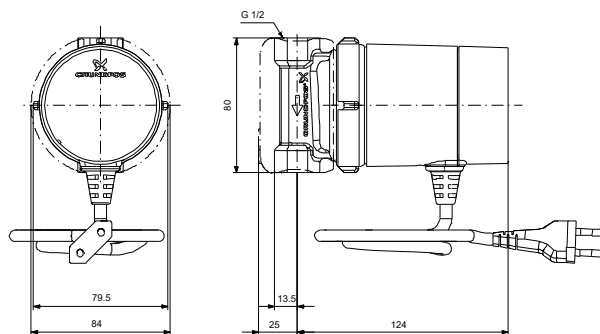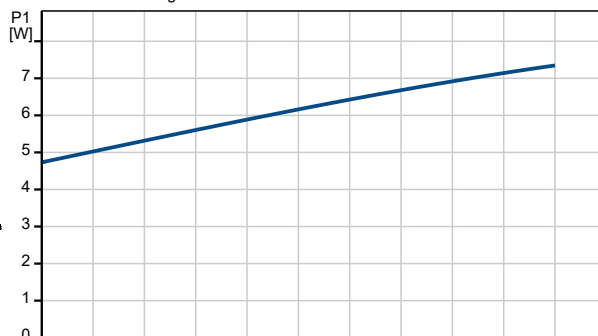

93093537 COMFORT 15-14 B TDT

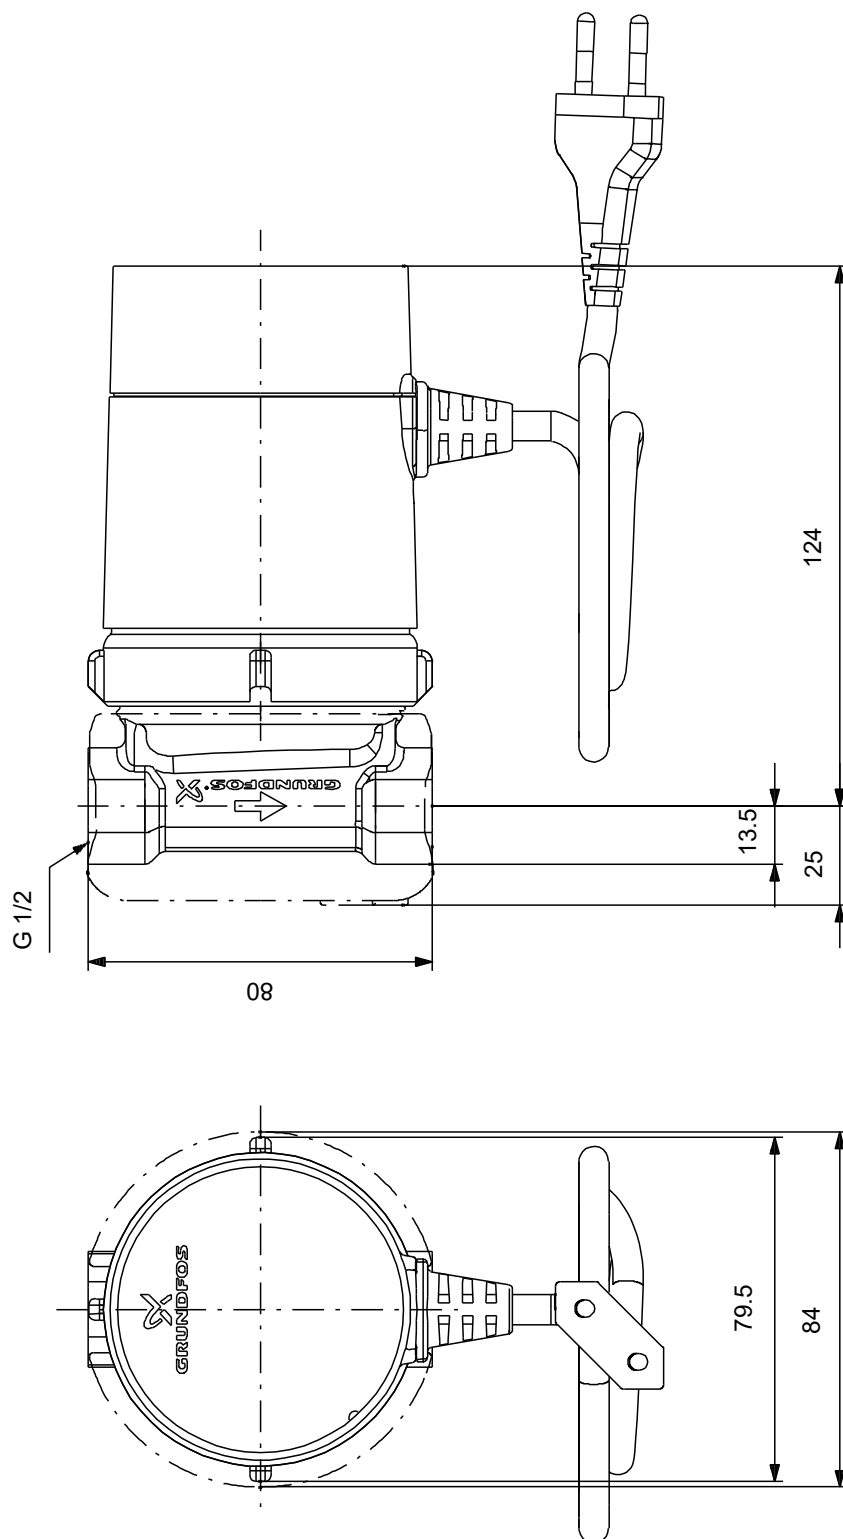

Upozornenie! Všetky jednotky musia byť v [mm], pokiaľ nie je uvedené inak.
Poznámka: Tento zjednodušený rozmerový náčrtok nezobrazuje všetky detaily.

93093537 COMFORT 15-14 B TDT



Upozornenie! Všetky jednotky sú v [mm], pokiaľ nie je uvedené inak!

