

Množstvo	Popis
1	COMFORT 15-14 BX T Objednacie č.: 93094846 Poznámka: Obrázok produktu sa môže líšiť od skutočného produktu COMFORT T is an efficient circulator designed for hot-water recirculation in residential buildings with a dedicated return line. It is compatible with all types of water heater tanks, tankless systems, solar or heat pumps regardless of whether the system has mixing or tampering valves installed. The pump features a compact housing and a permanent magnet with an integrated control unit. The spherical rotor, equipped with an impeller, ensures optimal functionality supported by a robust single-bearing ball system. The drinking-water approved brass pump housing guarantees both safety and reliability. COMFORT T moreover features a built-in temperature sensor to maintain water temperature. COMFORT T features the temperature control mode that automatically activates the pump when the internal temperature sensor detects that the water temperature drops below a certain level. The control mode automatically adjusts the on/off temperature based on the maximum temperature measured in the system. The maximum temperature of the system is measured every 12 hours for 15 minutes, enabling dynamic adjustment of the on/off temperature. The product offers: • Q-H performance that is designed for single—and multi-family homes, depending on the required duty point to accommodate heat loss in a specific pipe layout. • Heat loss reduction by 25 % compared to continuously running pump. • Low power consumption and silent operation. • Compliance with pipe manufacturers' flow velocity limits, including DN 15, DN 20 PEX, copper, and others. • Drinking-water approval, ensured by the brass pump housing, stainless-steel rotor, and composite impeller. • A design that makes it easy to clean limescale and foreign deposits by removing the pump head, enabling the product to meet unlimited water hardness requirements. • Dry-running protection to prevent failure if the system runs out of water. • Multiple installation positions, even with the pump head pointing downwards. • A pump head designed to fit brass pump housings of old and new pumps of the same design, even from different pump manufacturers (such as WILO, VORTEX, LOWARA, DAB and others). • Easy electrical installation, which is provided by a pre-assembled power plug with a 1.5 m cable and a double insulation protection design, which eliminates the need for a ground wire. • Insulating shells for heat loss reduction. • Non-return and shut-off valves included in "BX" variant, reducing installation cost. • An optional venting flange that provides a simple way to vent or drain the system without the need to install an additional venting valve permanently. • Optional fittings for pipe connections in different sizes and types. • Optional non-return and shut-off valves are available.



Objednacie č.: [93094846](#)

Poznámka: Obrázok produktu sa môže líšiť od skutočného produktu

COMFORT T is an efficient circulator designed for hot-water recirculation in residential buildings with a dedicated return line. It is compatible with all types of water heater tanks, tankless systems, solar or heat pumps regardless of whether the system has mixing or tampering valves installed.

The pump features a compact housing and a permanent magnet with an integrated control unit.

The spherical rotor, equipped with an impeller, ensures optimal functionality supported by a robust single-bearing ball system.

The drinking-water approved brass pump housing guarantees both safety and reliability.

COMFORT T moreover features a built-in temperature sensor to maintain water temperature.

COMFORT T features the temperature control mode that automatically activates the pump when the internal temperature sensor detects that the water temperature drops below a certain level.


The control mode automatically adjusts the on/off temperature based on the maximum temperature measured in the system.

The maximum temperature of the system is measured every 12 hours for 15 minutes, enabling dynamic adjustment of the on/off temperature.

The product offers:

- Q-H performance that is designed for single—and multi-family homes, depending on the required duty point to accommodate heat loss in a specific pipe layout.
- Heat loss reduction by 25 % compared to continuously running pump.
- Low power consumption and silent operation.
- Compliance with pipe manufacturers' flow velocity limits, including DN 15, DN 20 PEX, copper, and others.
- Drinking-water approval, ensured by the brass pump housing, stainless-steel rotor, and composite impeller.
- A design that makes it easy to clean limescale and foreign deposits by removing the pump head, enabling the product to meet unlimited water hardness requirements.
- Dry-running protection to prevent failure if the system runs out of water.
- Multiple installation positions, even with the pump head pointing downwards.
- A pump head designed to fit brass pump housings of old and new pumps of the same design, even from different pump manufacturers (such as WILO, VORTEX, LOWARA, DAB and others).
- Easy electrical installation, which is provided by a pre-assembled power plug with a 1.5 m cable and a double insulation protection design, which eliminates the need for a ground wire.
- Insulating shells for heat loss reduction.
- Non-return and shut-off valves included in "BX" variant, reducing installation cost.
- An optional venting flange that provides a simple way to vent or drain the system without the need to install an additional venting valve permanently.
- Optional fittings for pipe connections in different sizes and types.
- Optional non-return and shut-off valves are available.


93094846 COMFORT 15-14 BX T

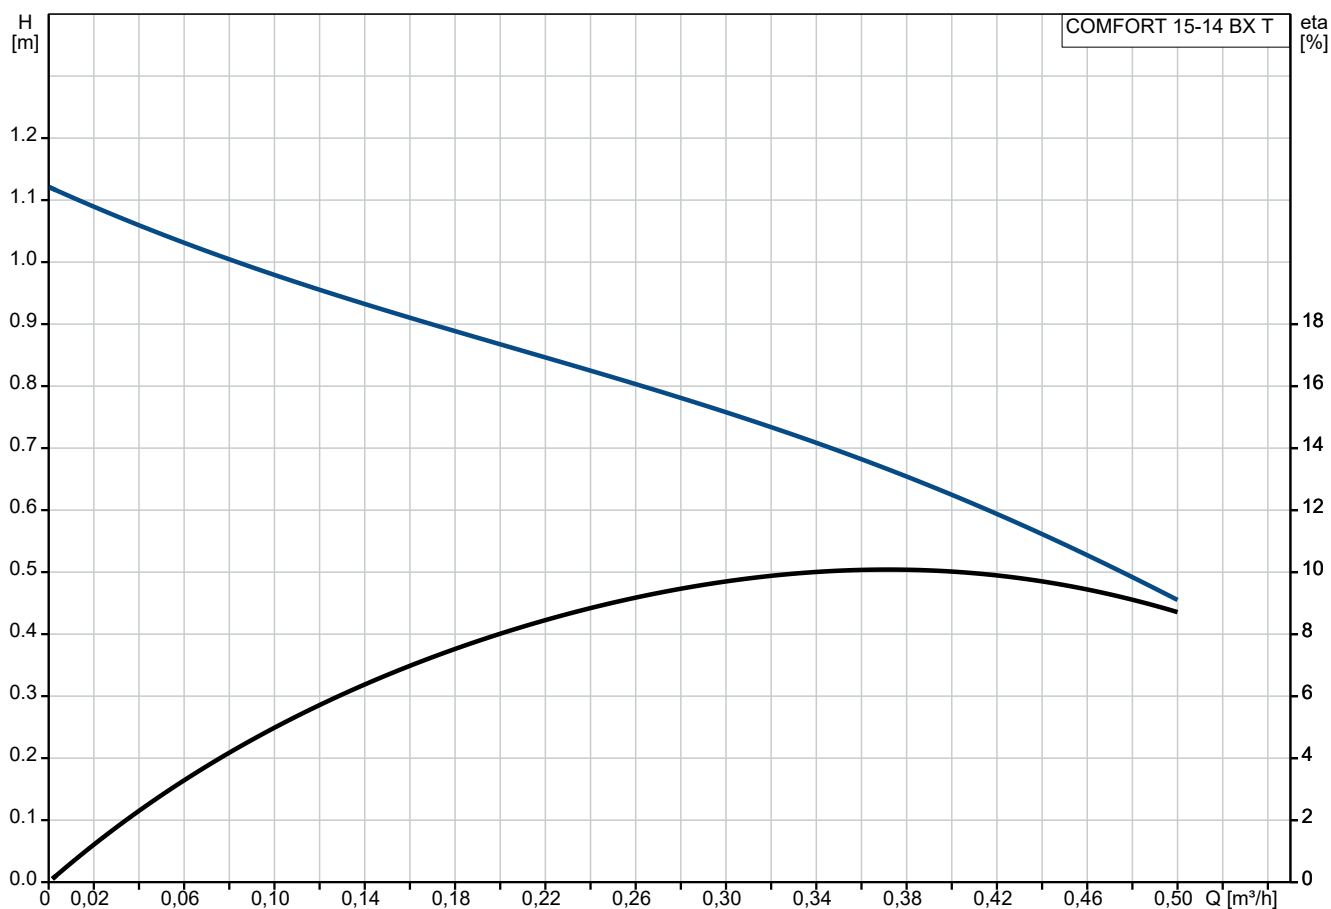


Čerpaná kvapalina = Voda

Teplota kvapaliny počas prevádzky = 60 °C




Hustota = 983.2 kg/m³

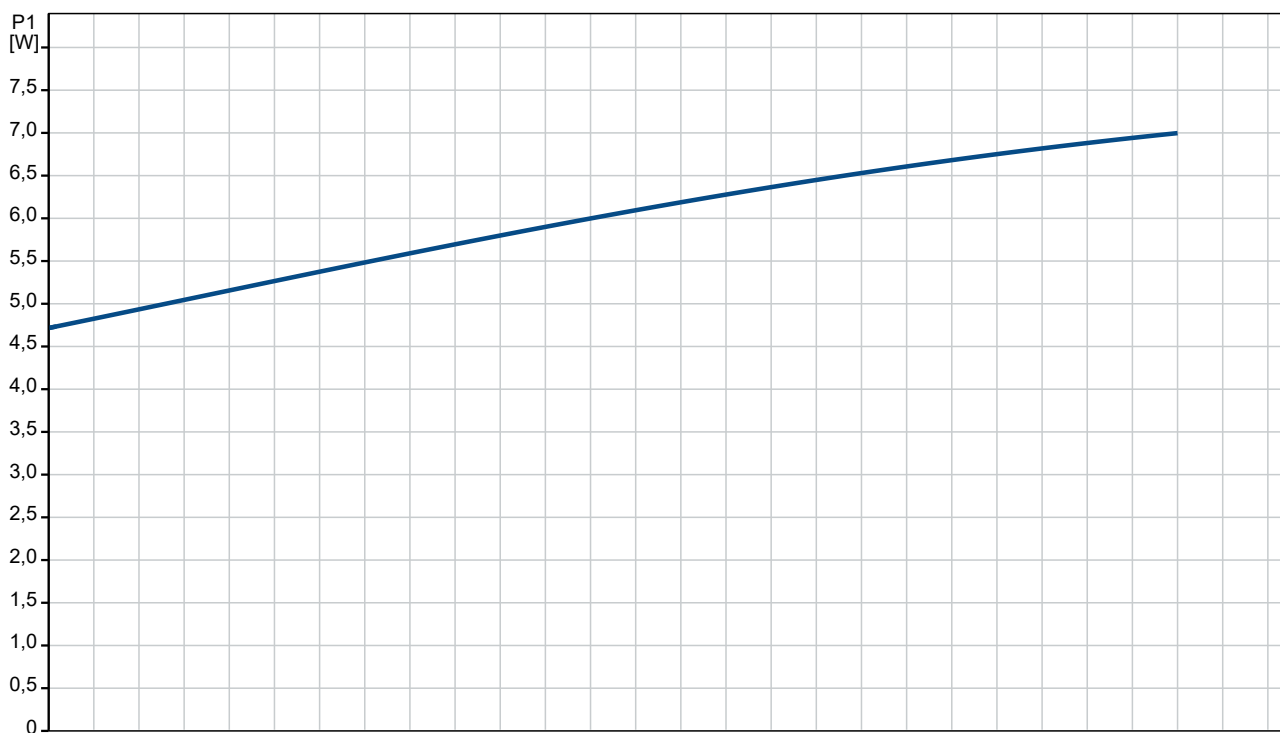


Popis	Hodnota
Všeobecné informácie:	
Názov produktu:	COMFORT 15-14 BX T
Objednacie číslo:	93094846
Číslo EAN:	5715467696189
Techn.:	
Počet otáčok:	1
Menovitý prietok:	0.33 m³/h
Men.dopravná výška:	0.9 m
Max. výtláčna výška:	14 dm
Trieda TF:	95
Schválenia:	CE,VDE,EAC,WEEE
Materiály:	
Teleso čerpadla:	Mosadz CuZn39Pb3, MS58
Obežné koleso:	Kompozit PPO-GF20/Stainless steel
Inštalácia:	
Min. okol. teplota:	0 °C
Maximálny prevádzkový tlak:	10 bar
Potr. prip. štandard:	ISO 228-1
Druh pripojenia:	G
Veľkosť pripojenia:	1 inch
PN pre potrubnú prípojku:	PN 10
Pripojenie na prip.:	140 mm
Kvapalina:	
Čerpaná kvapalina:	Voda
Rozsah teploty kvapaliny:	2 .. 95 °C
Vybraná teplota kvapaliny:	60 °C
Hustota:	983.2 kg/m³
Elektrické údaje:	
P1 max.:	7 W
f:	50 / 60 Hz
Menovité napätie:	1 x 230 V
Elektrický prúd pre otáčkový stupeň 3:	0.07 A
Krytie IP:	IP44
Izolácia:	F
Norma na ochranu pred výbuchom:	ELECT.
Teplotná ochrana:	Impedančne chránené
Riadiace jednotky:	
Operation mode include:	Temperature
Iné:	
Čistá hmotnosť:	1.14 kg
Hrubá hmotnosť:	1.24 kg
Prepravné množstvo:	0.003 m³
Švédčina:	5792024
Krajina pôvodu:	DE
Tarifná klasifikácia č.:	84137030

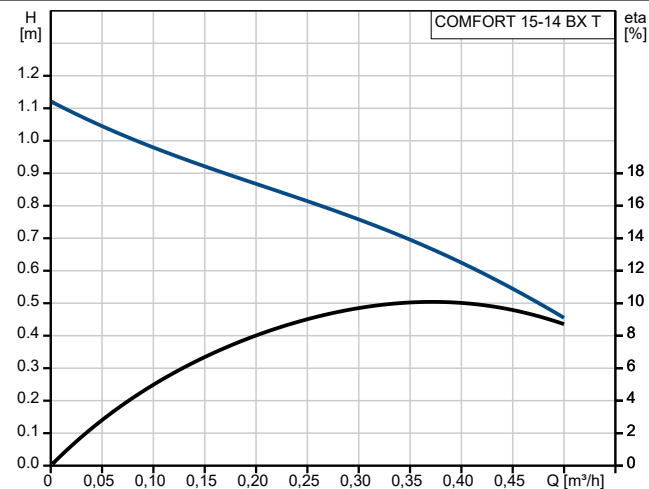

Čerpaná kvapalina = Voda
Teplota kvapaliny počas prevádzky = 60 °C
Hustota = 983.2 kg/m³

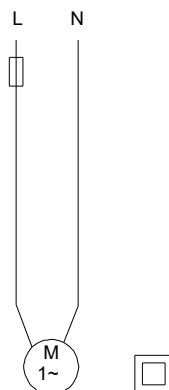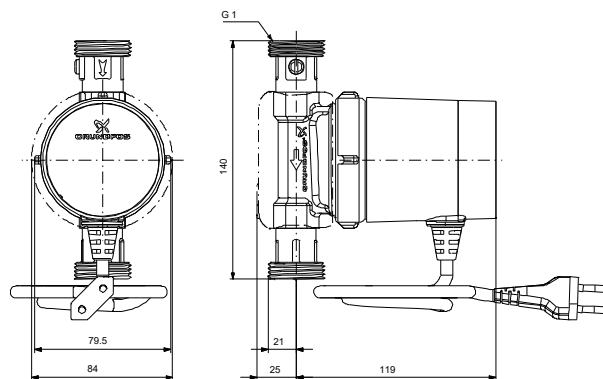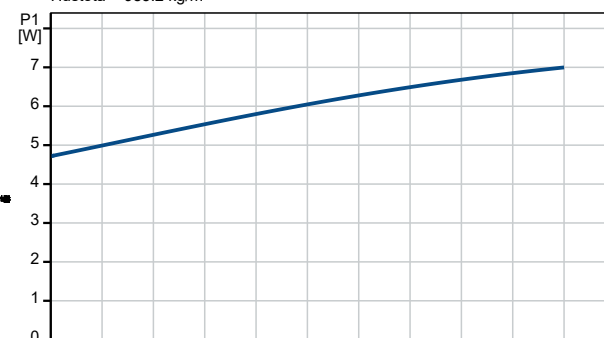

93094846 COMFORT 15-14 BX T

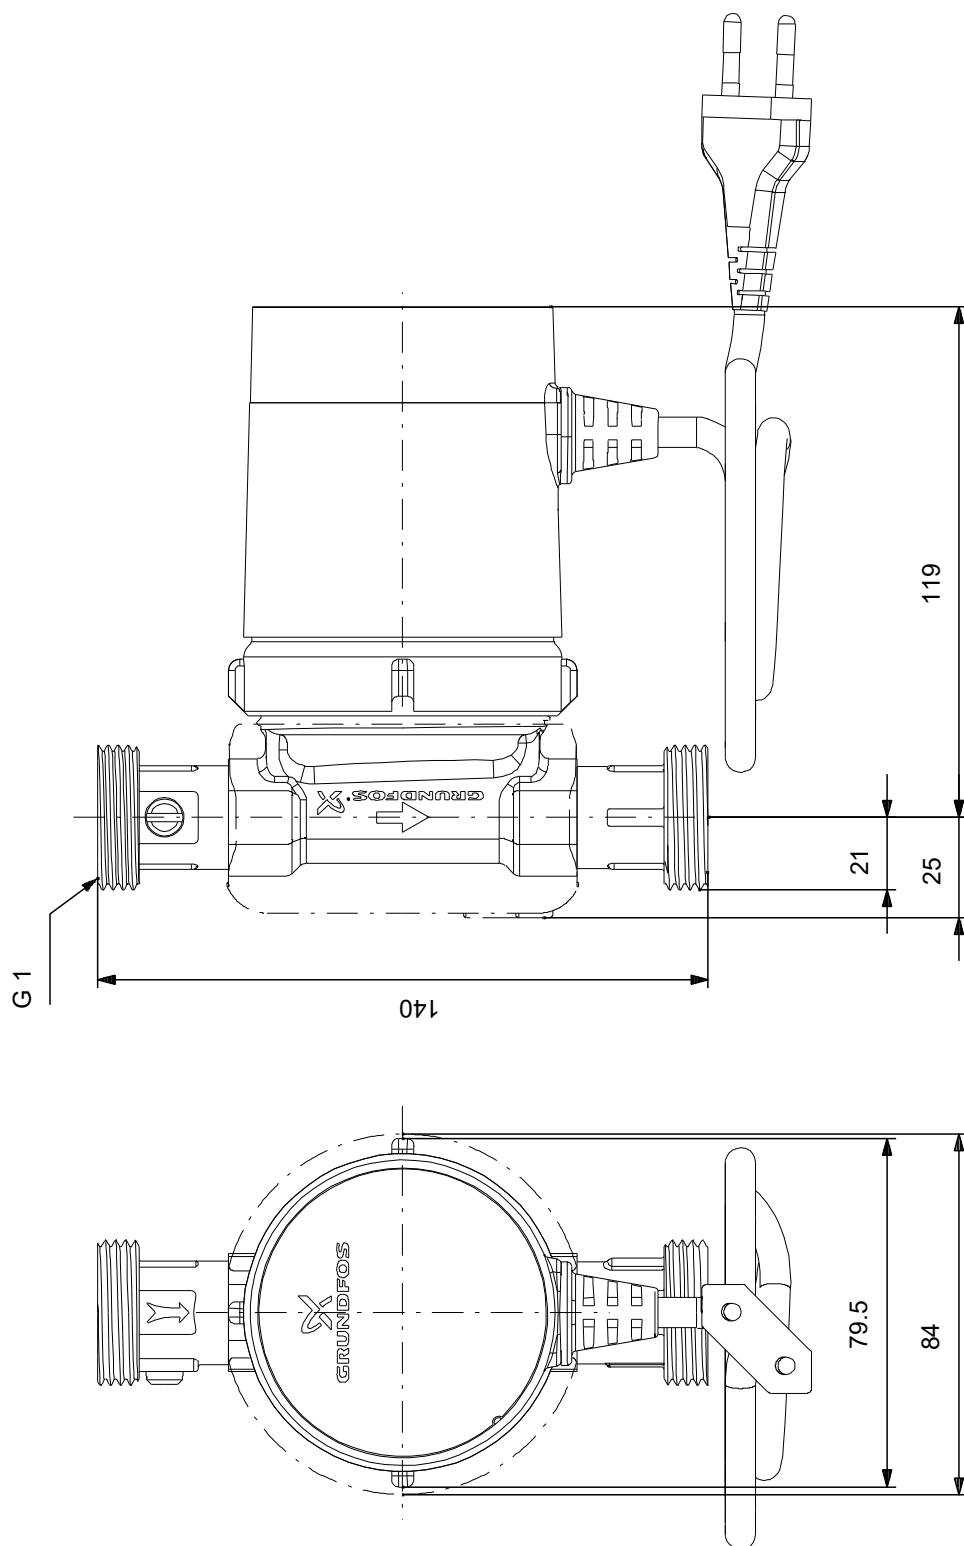

Upozornenie! Všetky jednotky musia byť v [mm], pokiaľ nie je uvedené inak.
Poznámka: Tento zjednodušený rozmerový náčrtok nezobrazuje všetky detaily.

93094846 COMFORT 15-14 BX T



Upozornenie! Všetky jednotky sú v [mm], pokiaľ nie je uvedené inak!

