

Množstvo	Popis
----------	-------

1	PM START  Poznámka: Obrázok produktu sa môže líšiť od skutočného produktu Objednacie č.: 93225672 Grundfos PM START pressure manager is designed for automatic start/stop control of Grundfos and other water supply pumps. PM START is a basic control solution suitable for applications where start and stop operation of the pump according to consumption is needed. PM START starts the pump when a start cut-in pressure of 1.5 or 2.2 bar is reached and keeps the pump running as long as there is sufficient flow. PM START stops the pump in case of water shortage and protects it from dry running. In case of temporary blackout, the pressure manager automatically resumes operation once power has been restored.
---	---



Poznámka: Obrázok produktu sa môže líšiť od skutočného produktu

Objednacie č.: [93225672](#)


Grundfos PM START pressure manager is designed for automatic start/stop control of Grundfos and other water supply pumps.

PM START is a basic control solution suitable for applications where start and stop operation of the pump according to consumption is needed.


PM START starts the pump when a start cut-in pressure of 1.5 or 2.2 bar is reached and keeps the pump running as long as there is sufficient flow. PM START stops the pump in case of water shortage and protects it from dry running.

In case of temporary blackout, the pressure manager automatically resumes operation once power has been restored.

Popis	Hodnota
Všeobecné informácie:	
Názov produktu:	PM START
Objednacie číslo:	93225672
Číslo EAN:	5715469508084
Techn.:	
Min prietok:	1 m³/h
Schválenia:	CE
Spätný ventil:	YES
Nastaviteľný štartovací tlak:	N
Spúšťací tlak:	2.2 bar
Počet čerpadiel:	1
Inštalácia:	
Rozsah teploty okolia:	0 .. 50 °C
Maximálny prevádzkový tlak:	10 bar
Druh pripojenia:	G
Veľkosť pripojenia:	1 inch
Kvapalina:	
Čerpaná kvapalina:	Voda
Rozsah teploty kvapaliny:	0 .. 60 °C
Vybraná teplota kvapaliny:	20 °C
Hustota:	998.2 kg/m³
Elektrické údaje:	
P1 max.:	1500 W
f:	50 / 60 Hz
Menovité napätie:	1 x 220-240 V
Menovitý prúd:	10 A
Krytie IP:	IP65
Dĺžka kábla:	1.5 m
Zástrčka:	Zástrčka Schuko
Riadiace jednotky:	
Typ konektora:	Type E/F (CEE7/7)
Ochr. pr. prev. nasucho:	Pressure switch
Iné:	
Čistá hmotnosť:	1.18 kg
Hrubá hmotnosť:	1.4 kg
Prepravné množstvo:	0.006 m³
Hodí sa k nasledujúcemu produktu (produktom):	CMB, CM, JP
Fínčina:	4772080
Krajina pôvodu:	IT
Tarifná klasifikácia č.:	85371098
Environmentálne schválenia:	WEEE

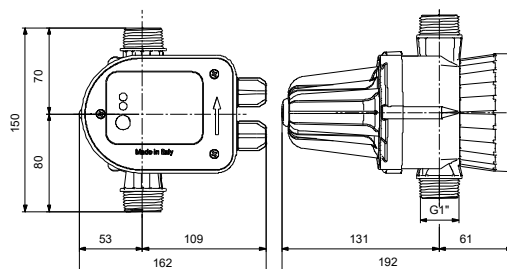

93225672 PM START

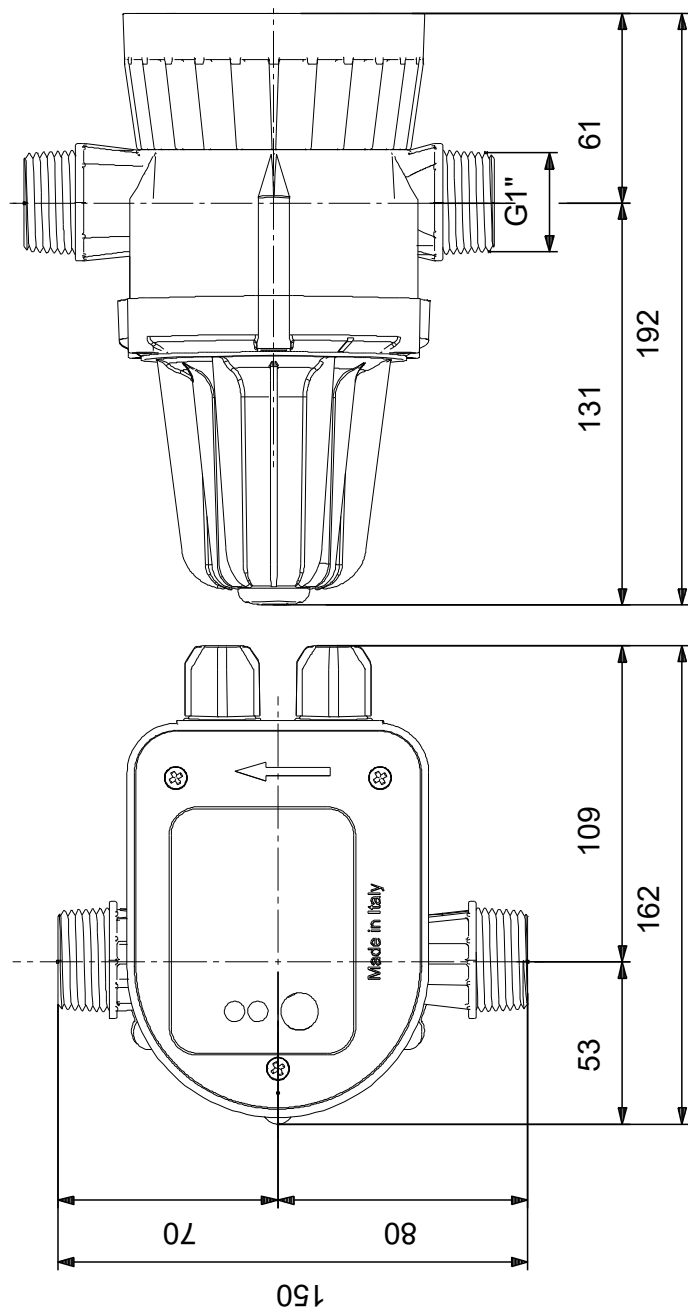

Upozornenie! Všetky jednotky musia byť v [mm], pokiaľ nie je uvedené inak.
 Poznámka: Tento zjednodušený rozmerový náčrtok nezobrazuje všetky detaily.

