

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60191269

Customer pos. no.:

Model :

FEKA FXV 25.07.4 T-NA 400 V

Type of installation :

Wet - Pump only

Pump data

Free passage : 65 mm
Max. immersion depth : 20 m
Min. fluid temperature : 0 °C
Max. fluid temperature : 50 °C

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998.3 kg/m³
Kinematic viscosity : 1.005 mm²/s
Vapor pressure : 2.34 kPa



Hydraulic data (duty point)

Flow :
Head :

Materials

Handle Cast iron (EN GJL 200)
Pump body / motor Cast iron (EN GJL 200)
Impeller Cast iron (EN GJL 250)
Mechanical seal pump side SiC-SiC/SiC-C
Mechanical seal motor side SiC/Carbon
O-Ring NBR
Motor shaft Stainless Steel AISI 304

Curve tolerance according to ISO 9906

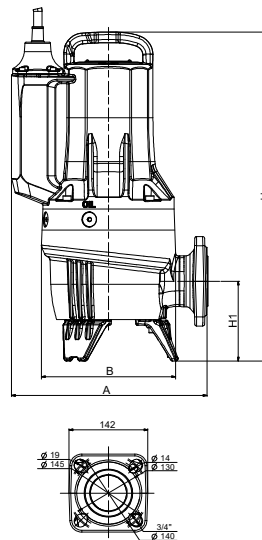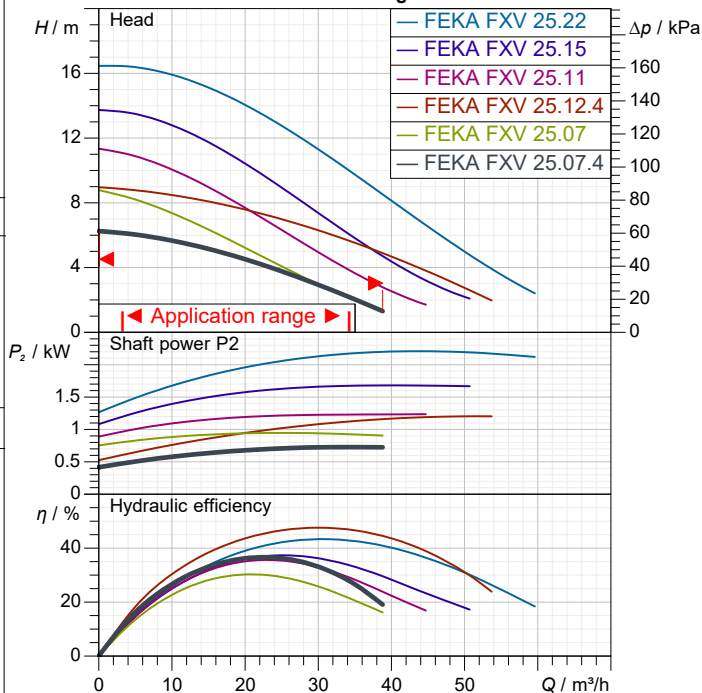

Motor data

Motor brand : DAB
Nominal power P2 : 0.7 kW
Rated speed : 2870 1/min
Rated voltage : 3~ 400 V 50 Hz
Nominal current : 2.2 A
Degree of protection : IP 68

Weight :

Accessory weight :

Dimensions in

mm

A	307				
B	211				
DN1	65				

Pump connection

Suction side : --
Discharge side : DN 65 PN10/6


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

FEKA FXV 25.07.4 T-NA 400 V

Curve tolerance according to ISO 9906

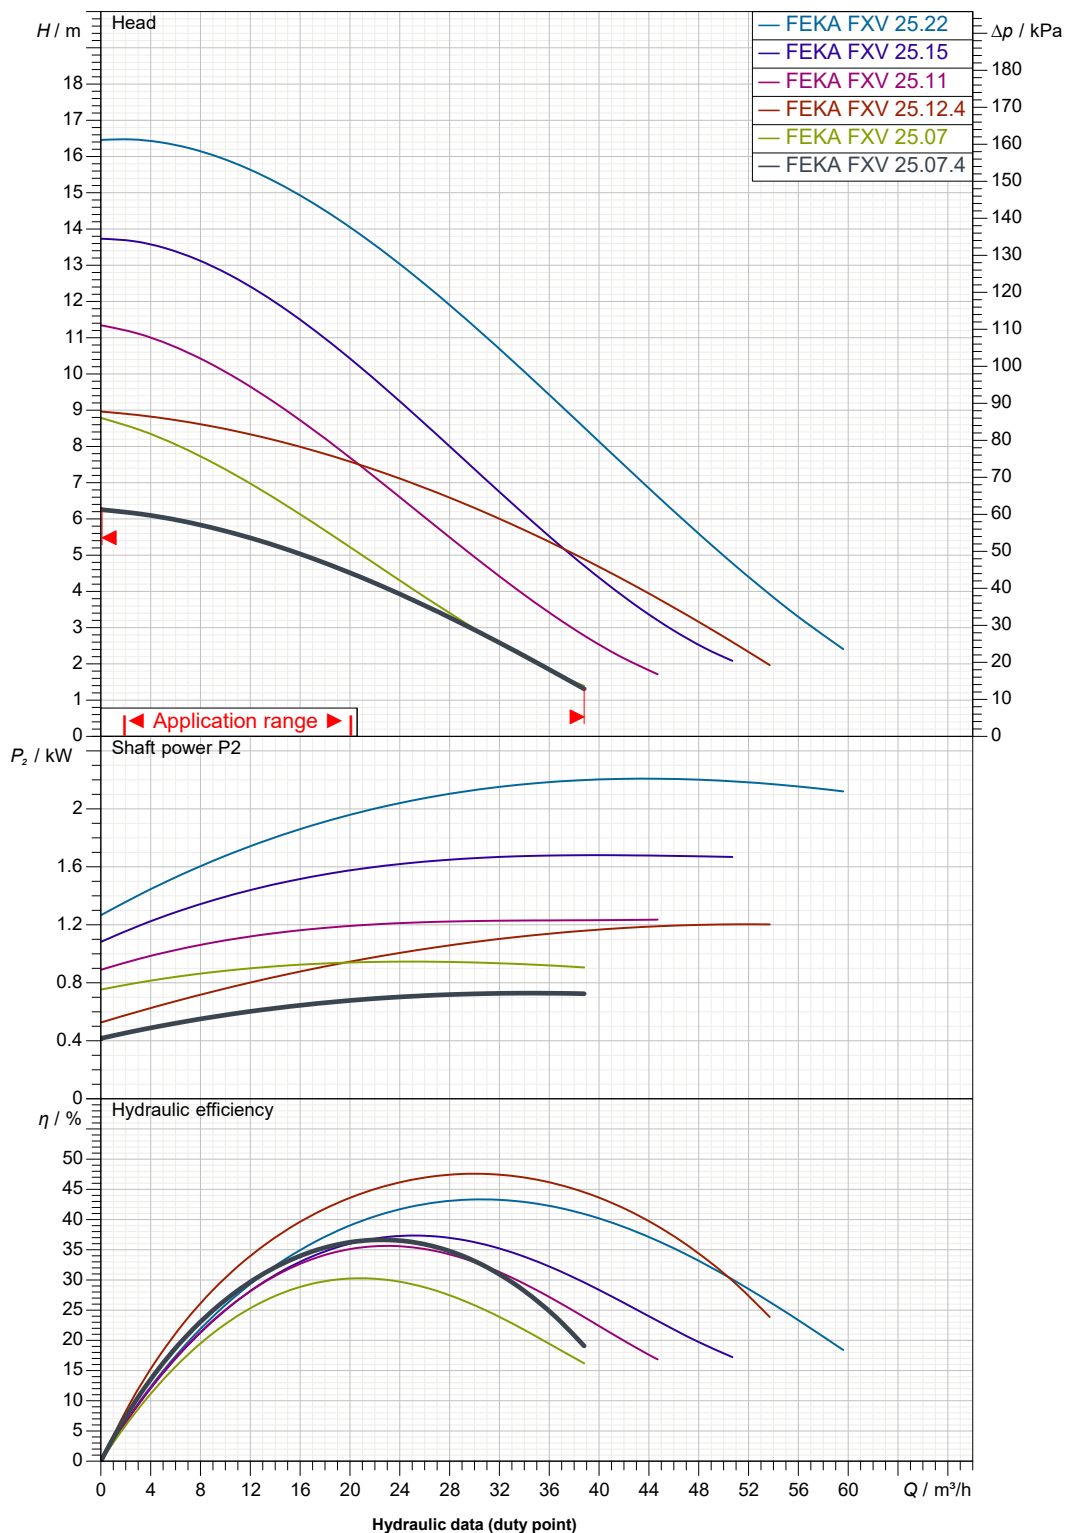

Suction side :

Discharge side :
DN 65 PN10/6
--

Flow :

Head :

Rated speed :
2870 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IT

OWNER_

ISSUE_DATE

2023-07-24



DIMENSIONAL DRAWING

2023-07-24

Page 3 / 3



DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

FEKA FXV 25.07.4 T-NA 400 V

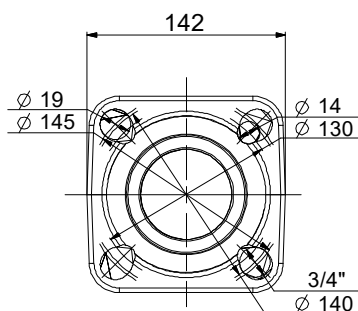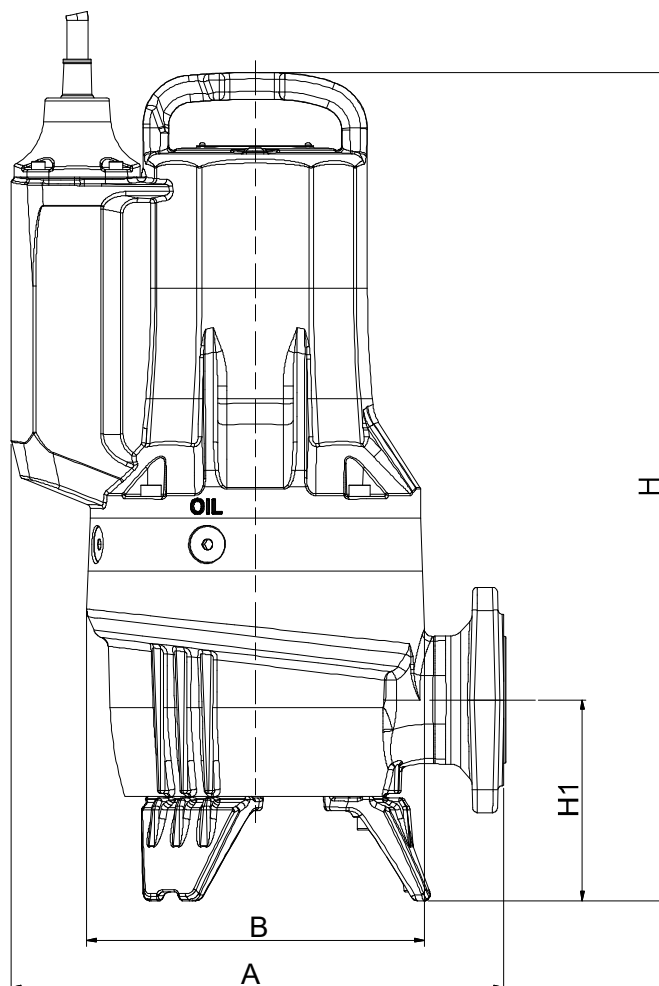

Dimensions in mm

Pump connection

1	A	307								
2	B	211								
3	DN1	65								
4										
5										
6										
7										
8										
9										
10										
11										

Suction

Discharge
DN 65 PN10/6
--

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IC

OWNER_

ISSUE_DATE

2023-07-24