

General Data

Description Value

General Information

Product name: QF 125-7-MTSF-150_35.0HP With 3~
Price: Price on req.

Technical

Speed for pump data: 2,900 1/min
Actual calculated flow:
Resulting head of the pump:
Head max.: 139.7 m
Stages: 7
Curve tolerance: ISO 9906.2012 3B
Pump type: QF 125
Valve: Pump with built-in non-return valve

Liquid

Pumped liquid: Water
Liquid temp. range: 20 °C
Density: 998.3 kg/m³

Materials

Pump: Stainless steel DIN W.-Nr. 1.4301 AISI 304
Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304
Motor: CI FG-260

Installation



Max. ambiente temperature: 40 °C
Max. Operating Pressure : Maximum 0.67m (67 bar)
Pump outlet: Rp 5
Motor diameter: 150 mm

Electrical Data

Motor type: MTSF-150_35.0HP
No poles: 2
Rated Power: 26 kW
Frequency: 50 Hz
Rated Volt.: 380 V
Rated Current: 58.5 A
Power Factor: 0.82
Eff.: 82 %

Others

Net weight
Net Pump Weight: 42 kg

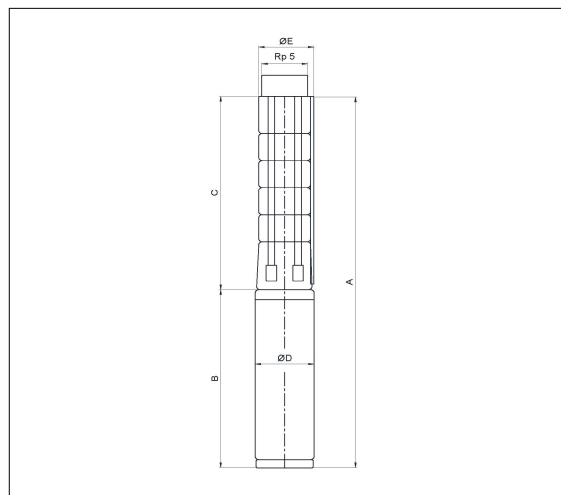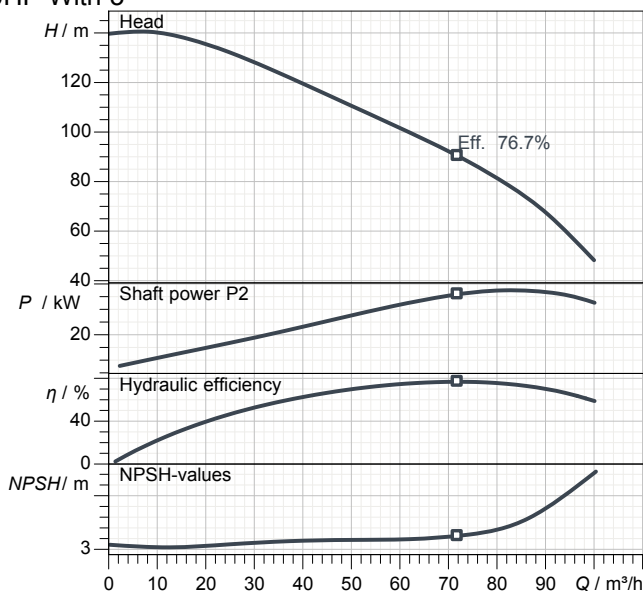

Name	mm
A	2,502
B	1,114
C	1,388
D	145
E*	270
E**	270

E = Maximum diameter of pump inclusive of cable guard & motor

* Maximum diameter of pump with one motor cable

** Maximum diameter of pump with two motor cable

QF 125-7-MTSF-150_35.0HP With 3~

Customer

Supplier

Company name


Department

Issued by

Phone number

Fax no.

e-mail address

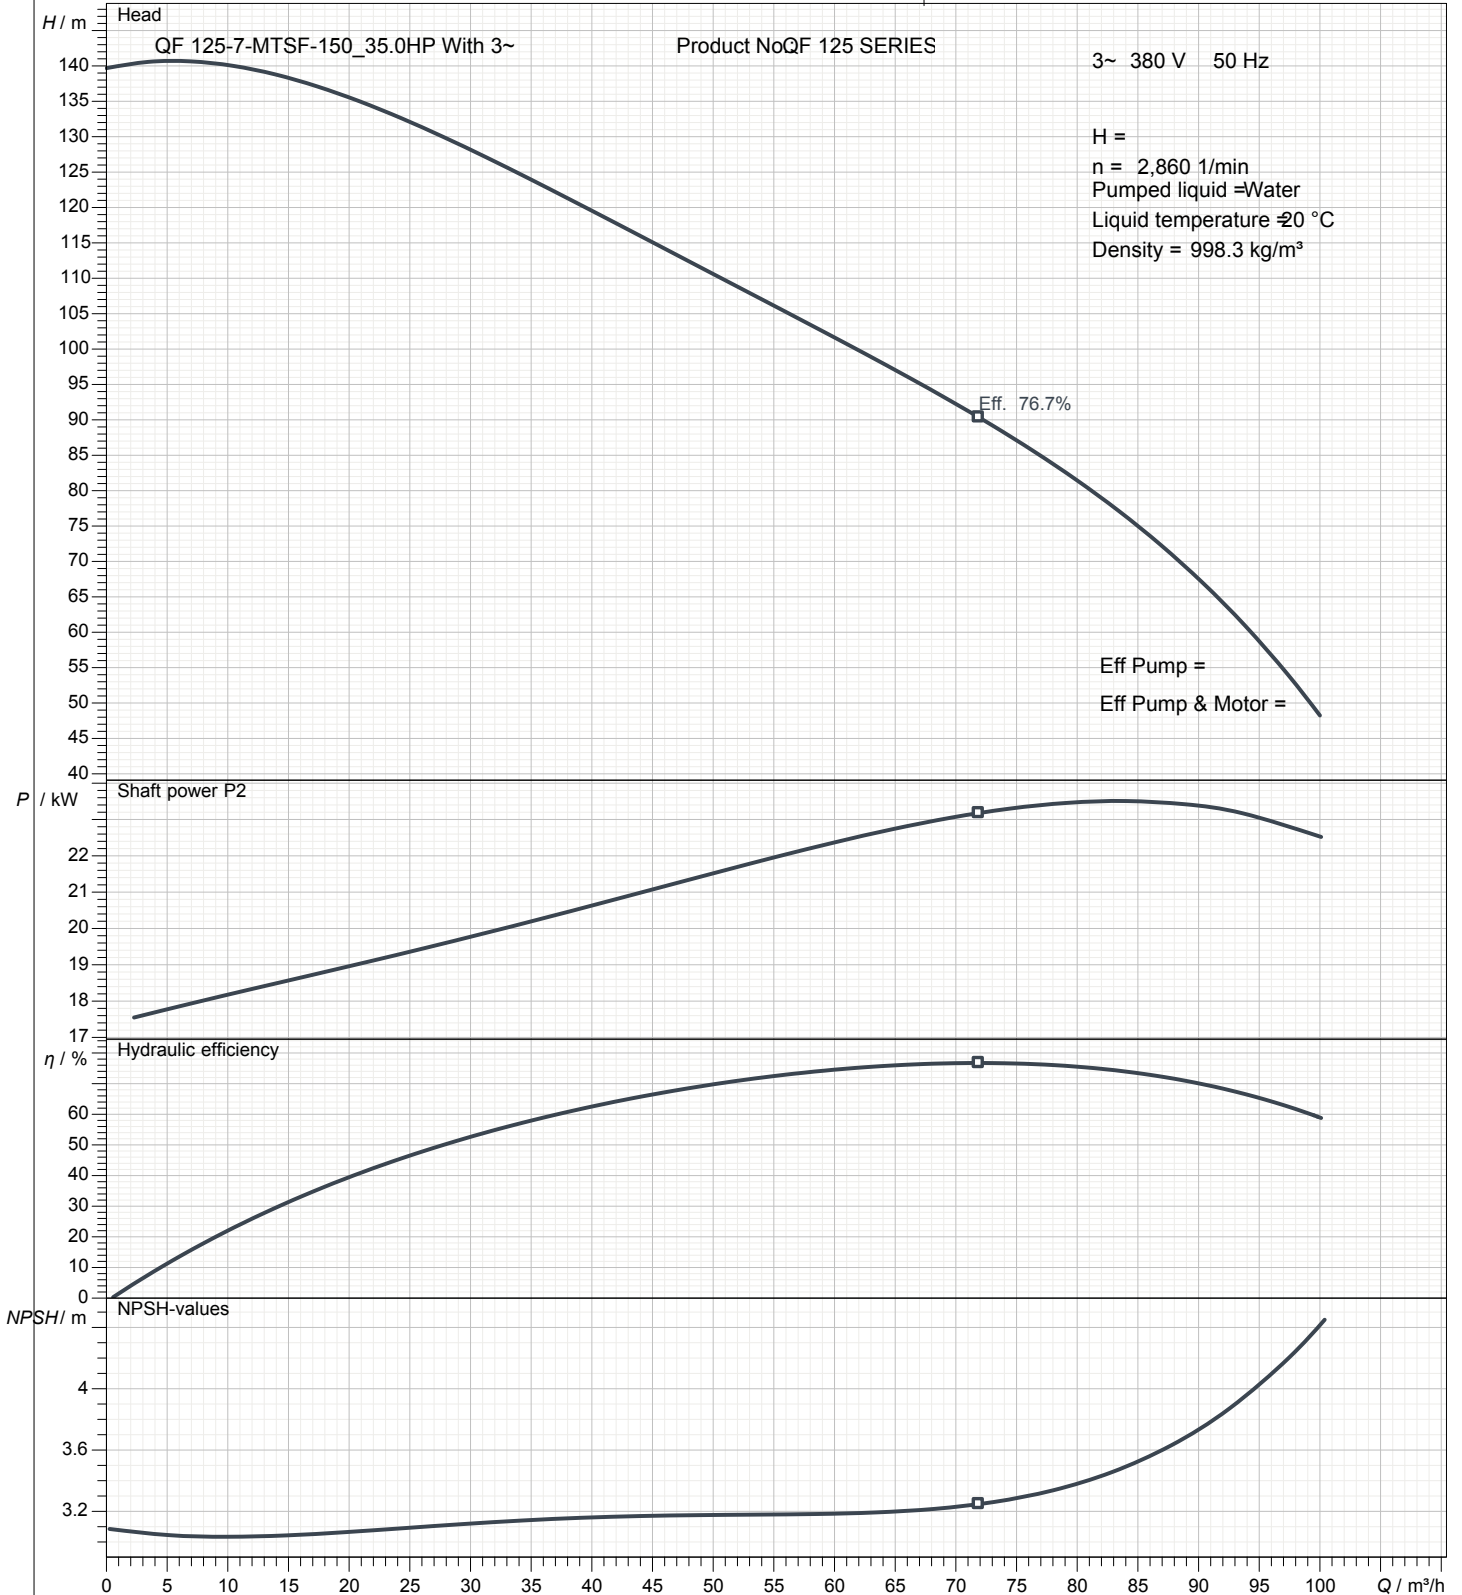

Project ID

40BC2546-D827-46D1-94CA-9CE6E914BAD

Project

Creation software

Spaix® 5-2020.2 - 2020/11/16 (E

Issue date

2021-02-22

Last update

2021-02-22

Company name
Department
Issued by
Phone number
Fax no.
e-mail address

Customer

Supplier

Dimension QF


Product No.: QF 125 SERIES

Inlet / outlet

Suction port	Discharge port
Rp 5	Rp 5
DN 100 PN 16/40	DN 100 PN 16/40

Dimensions	mm
------------	----

A	2,502
B	1,114
C	1,388
D	145
E*	270
E**	270

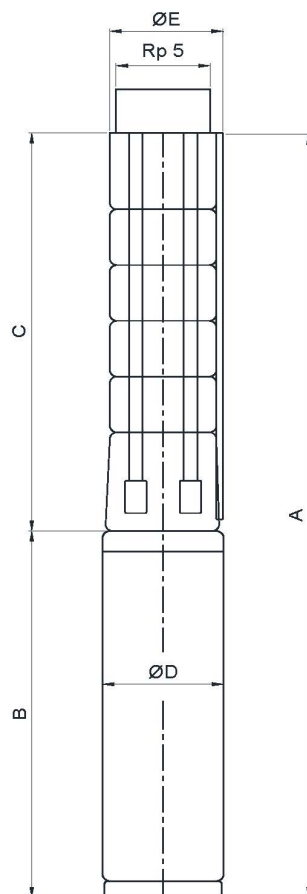

E * = Maximum diameter of pump
inclusive of cable guard & motor

E** = Maximum diameter of pump
with two motor cable