

General Data

Description Value

General Information

Product name: QF 6-6-Premium-100_0.75HP With 3~

Price: Price on req.

Technical

Speed for pump data: 2900 1/min

Actual calculated flow:

Resulting head of the pump:

Head max.: 38.54 m

Stages: 6

Curve tolerance: ISO 9906.2012 3B

Pump type: QF 6

Valve: Pump with built-in non-return valve

Liquid

Pumped liquid: Water

Liquid temp. range: 20 °C

Density: 998.3 kg/m³

Materials

Pump: Stainless steel DIN W.-Nr. 1.4301 AISI 304

Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304

Motor: Stainless steel DIN W.-Nr. 1.4301 AISI 304

Installation

Max. ambiente temperature: 40 °C

Max. Operating Pressure : Maximum 0.67m (67 bar)

Pump outlet: Rp 2 1/2"

Motor diameter: 100 mm

Electrical Data

Motor type: Premium-100_0.75HP

No poles: 2

Rated Power: 0.55 kW

Frequency: 50 Hz

Rated Volt.: 380 V

Rated Current: 1.5 A



Power Factor: 0.76

Eff.: 67 %

Others

Net weight

Approx. Ship WT.: 3 kg

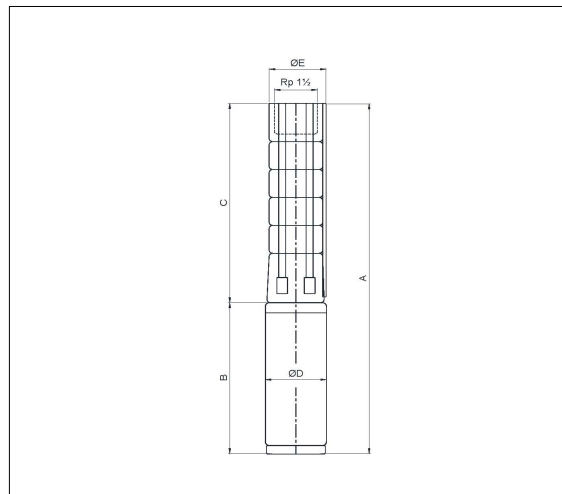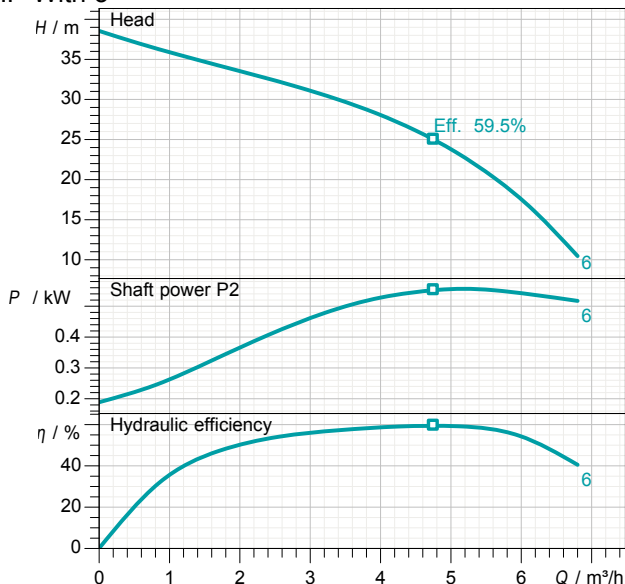

Name	mm
C	309
B	271
A	580
D	95
E	97


E = Maximum diameter of pump inclusive of cable guard & motor

QF 6-6-Premium-100_0.75HP With 3~

Customer

Supplier

Company name
Department
Issued by
Phone number
Fax no.
e-mail address

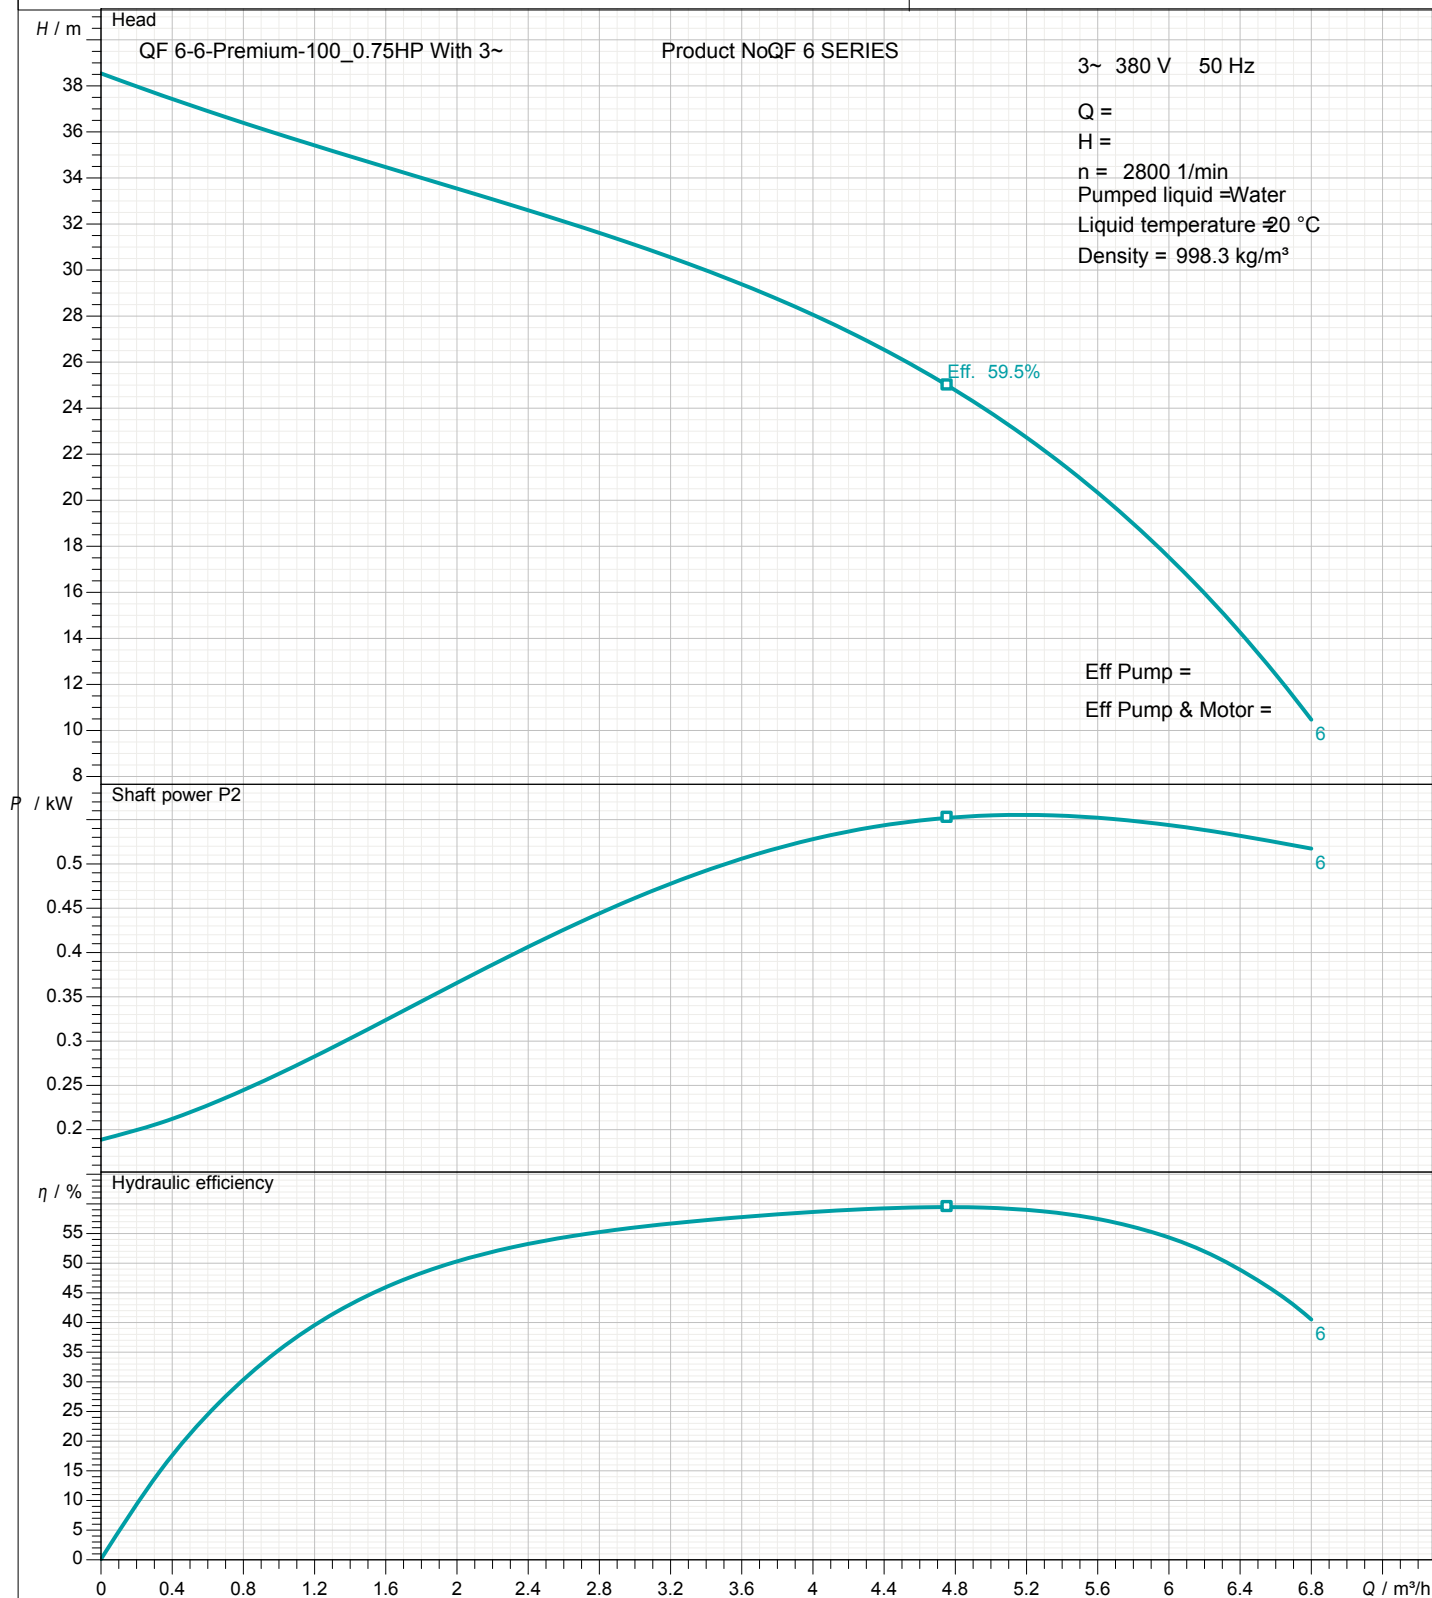

Project ID

4E4A6F77-8D84-459B-A4F3-A6F891CEA14E

Project

Creation software

Spaix, Version 4.3.10 - 2018/02/ 3/12/2019

Issue date

3/12/2019

Last update


3/12/2019

Customer

Supplier

Company name
Department
Issued by
Phone number
Fax no.
e-mail address

Dimension QF

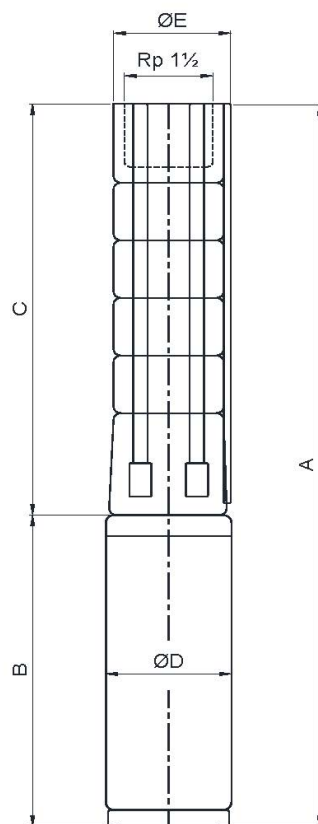

Inlet / outlet

Suction port

Discharge port

Rp 2 1/2

Rp 2 1/2

-

-

Dimensions

mm

C

309

B

271

A

580

D

95

E

97

E = Maximum diameter of pump
inclusive of cable guard & motor

Project ID

4E4A6F77-8D84-459B-A4F3-A6F891CEA148

Project

Creation software

Spaix, Version 4.3.10 - 2018/02/1

Issue date

3/12/2019

Last update

3/12/2019