

## General Data

Description Value

### General Information

Product name: QF 50-8-MTSF-150\_10.0HP With 3~  
Price: Price on req.

### Technical

Speed for pump data: 2900 1/min  
Actual calculated flow:  
Resulting head of the pump:  
Head max.: 91.48 m  
Stages: 8  
Curve tolerance: ISO 9906.2012 3B  
Pump type: QF 50  
Valve: Pump with built-in non-return valve

### Liquid

Pumped liquid: Water  
Liquid temp. range: 20 °C  
Density: 998.3 kg/m³

### Materials

Pump: Stainless steel DIN W.-Nr. 1.4301 AISI 304  
Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304  
Motor: CI FG-260

### Installation



Max. ambiente temperature: 40 °C  
Max. Operating Pressure : Maximum 0.67m (67 bar)  
Pump outlet: Rp 3  
Motor diameter: 150 mm

### Electrical Data

Motor type: MTSF-150\_10.0HP  
No poles: 2  
Rated Power: 7.5 kW  
Frequency: 50 Hz  
Rated Volt.: 380 V  
Rated Current: 18.3 A  
Power Factor: 0.84  
Eff.: 76 %

### Others

Net weight  
Net Pump Weight: 22 kg

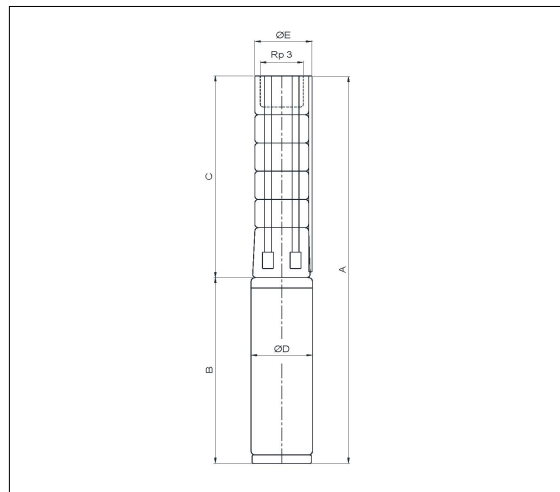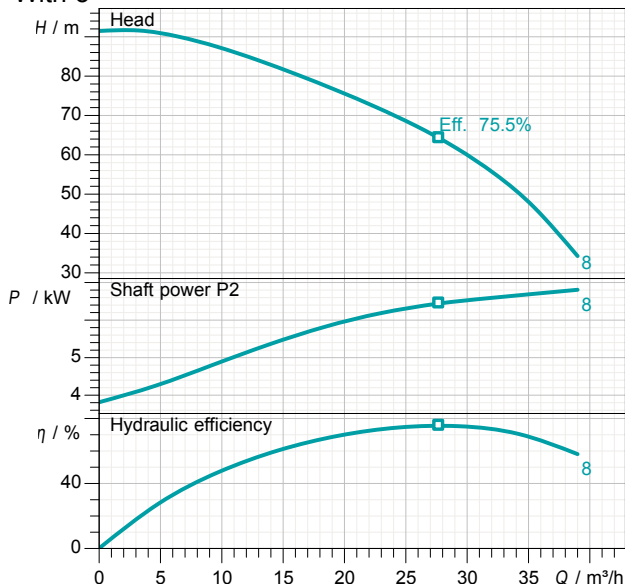

| Name | mm   |
|------|------|
| C    | 1038 |
| B    | 719  |
| A    | 1757 |
| D    | 145  |
| E*   | 143  |

E = Maximum diameter of pump inclusive of cable guard & motor

\* Maximum diameter of pump with one motor cable


\*\* Maximum diameter of pump with two motor cable

QF 50-8-MTSF-150\_10.0HP With 3~

Customer

Supplier

Company name  
Department  
Issued by  
Phone number  
Fax no.  
e-mail address

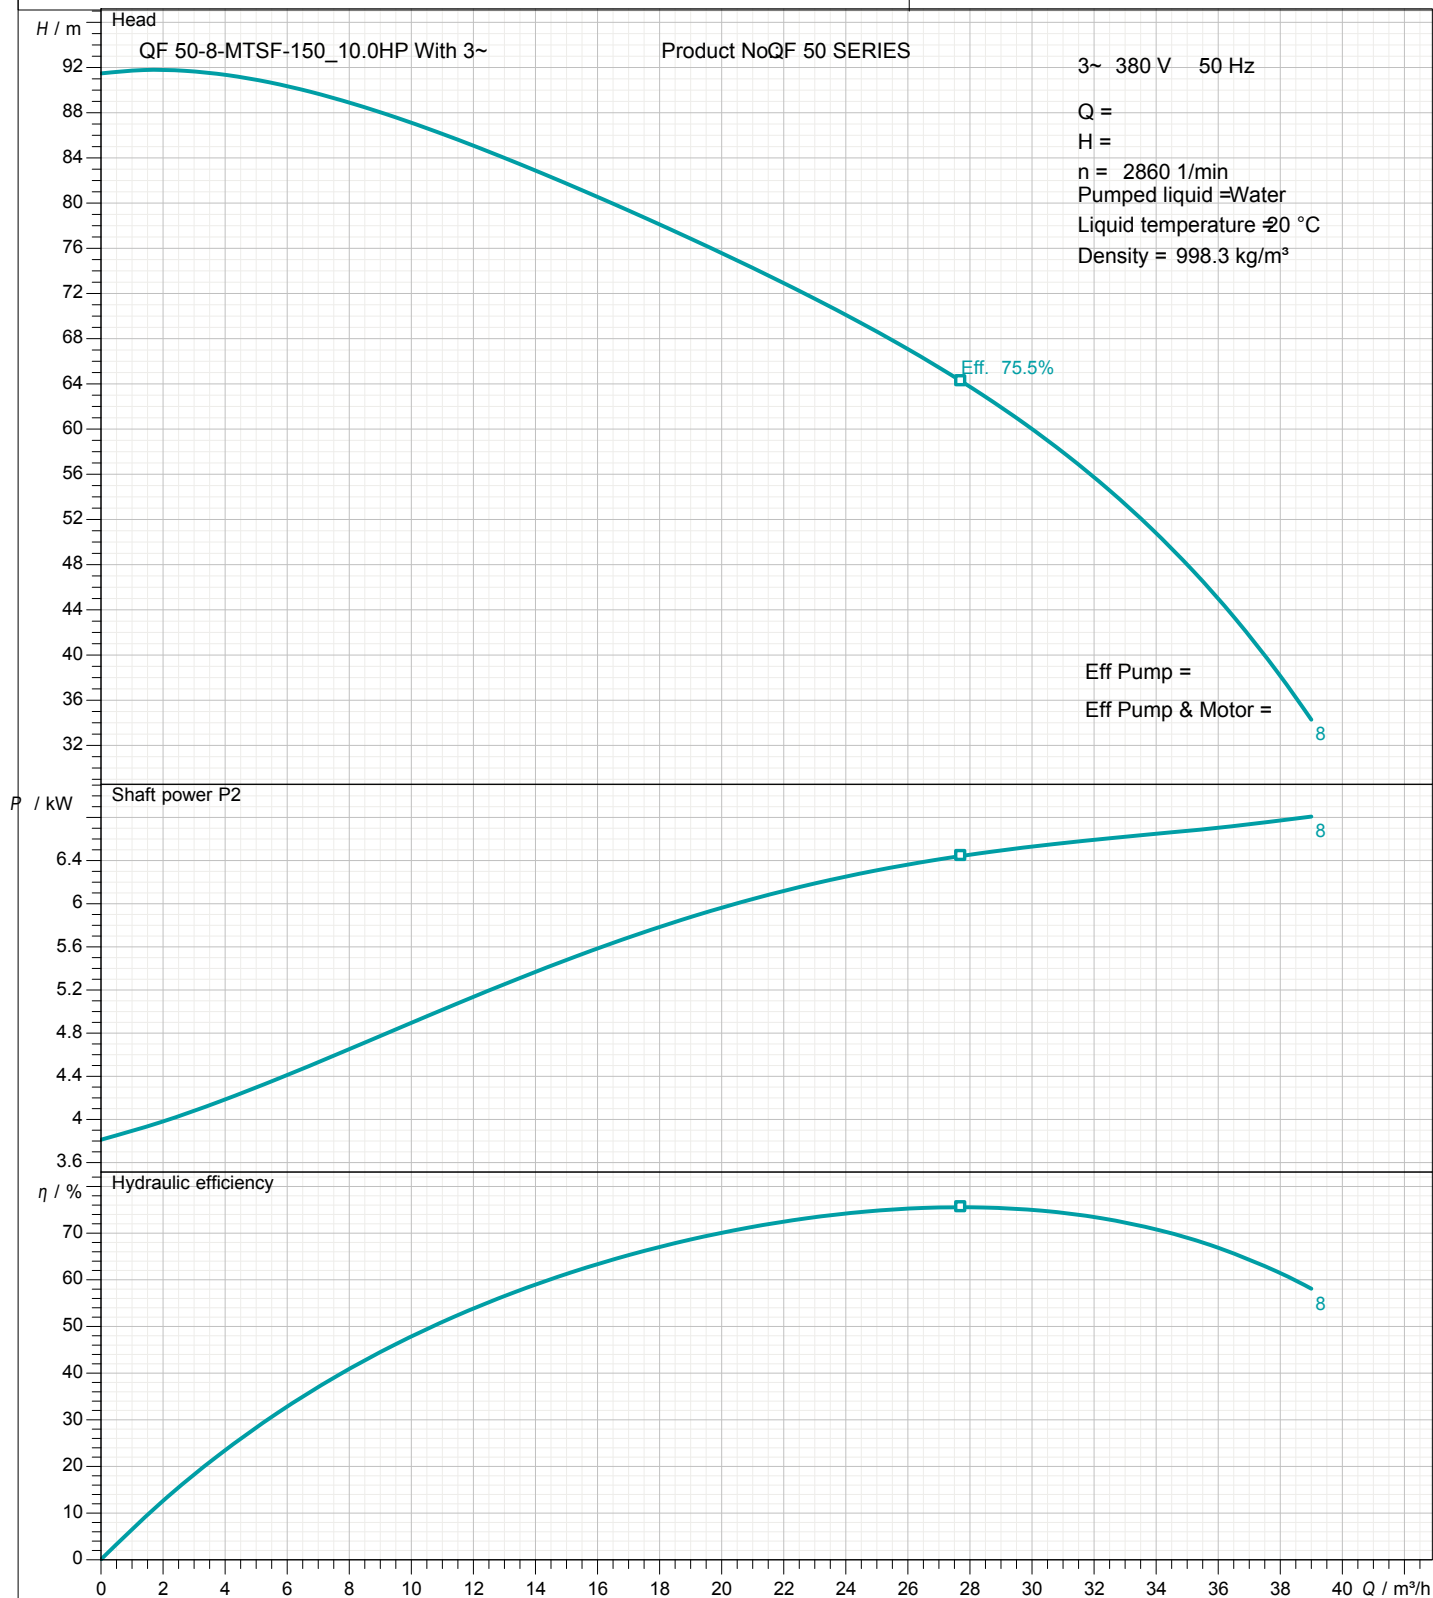

Project ID

4E4A6F77-8D84-459B-A4F3-A6F891CEA14E

Project

Creation software

Spaix, Version 4.3.10 - 2018/02/

Issue date

3/12/2019

Last update

3/12/2019

Customer

Supplier

Company name  
Department  
Issued by  
Phone number  
Fax no.  
e-mail address

Dimension QF

Product No.: QF 50 SERIES

**Inlet / outlet**

Suction port

Rp 3

DN 65 PN 16/40

Discharge port


Rp 3

DN 65 PN 16/40

**Dimensions**

**mm**

|     |      |
|-----|------|
| C   | 1038 |
| B   | 719  |
| A   | 1757 |
| D   | 145  |
| E*  | 143  |
| E** | 145  |

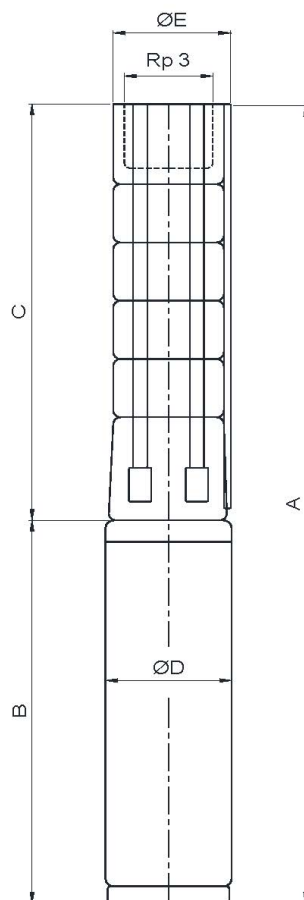

E \* = Maximum diameter of pump  
inclusive of cable guard & motor

E\*\* = Maximum diameter of pump  
with two motor cable

Project ID

4E4A6F77-8D84-459B-A4F3-A6F891CEA148

Project

Creation software

Spaix, Version 4.3.10 - 2018/02/1

Issue date

3/12/2019

Last update

3/12/2019